对本手册所包含的内容，荣伟电气有限公司拥有最终解释权，更多详细资料敬请垂询，本公司工程技术人员将竭诚为您服务；
因产品技术不断创新，请以实物或说明书为准；如有变更，届时恕不另行通知。
Rongwei Electric Co., Ltd. has the right of final interpretation of the contents contained in this manual.
More details please contact us, the company's engineering and technical staff will be happy to serve you;
Due to the continuous innovation of product technology, please refer to the physical or manual; Subject to change without prior notice.

R&R RONGWEI ELECTRIC 荣伟电气

地址: 浙江·温州市·海经区昆鹏街道雁云路176号15-4
ADD: 15-4 No.176, Yan Yun Avenue, MarineEconomic District,
Wenzhou, Zhejiang, China
TEL: +86-577-6167 8000 / 62770777
FAX: +86-577-6167 8080
URL: http://www.chinarongwei.com
E-mail: rongwei@chinarongwei.com

R&R RONGWEI ELECTRIC 荣伟电气

PRODUCTS CATALOG

2025 Version

防水系列 WATERPROOF SERIES

01

Connect to source
Bless the world

公司简介
COMPANY PROFILE

Rongwei Electric
Co., LTD

20+年

配线器材生产经验

Wiring accessories production experience

30+名

高级技术人员

Senior technical staff

荣伟电气有限公司位于浙江省温州市海经区机器人产业园，是一家集生产、研发、销售于一体的现代化企业，专业从事配线器材的生产已逾20年。

公司以“专业专注，高端有效，诚心挚诚”为经营理念，致力于探索新科技，研发新产品，以完善的管理，高端的品质将自身打造成为国内外知名品牌。 着眼于未来，与时俱进。

Rongwei Electric Co.,Ltd.(R&R) is located in robot industrial zone, Marine Economic District, Wenzhou City, Zhejiang Province. Who is a modernized enterprise with over 20 years of experience in producing connectors.

R&R's philosophy is to "focusing on professionalization, efficiency, high-end products, and sincerity". R&R has already spent many years on its long-term goal which is to "explore new technologies, develop new products". Per our successful experience and products, R&R has become a well-know brand in the world.

为此公司投入巨资更新生产设备，实现注塑生产中央统一管理，升级产品自动化装配系统。同时也十分注重实验室的建设，目前公司可独立完成对接连接器产品的防水、阻燃、高低温环境、耐腐蚀、抗冲击等多种性能指标的检测。

本公司通过了ISO9001国际质量管理体系的认证，并陆续获得了UL、TUV、ATEX、UKCA、CE、IP68、RoHS、REACH等产品认证和测试。

我公司生产的连接器产品广泛应用于通讯设备、配电设备、配电设施、仪器仪表、医疗器械等众多领域，不仅在国内占有相当的市场份额，产品还远销西欧，北美，日本，韩国等国家和地区，并成为如MOLEX、AMPHENOL、SAMSUNG等诸多知名公司的指定供应商。

荣伟电气愿成为您迈向成功之路的合作伙伴，期待与您一起携手“连接源头，祝福世界”！

Advancing with the times, the company has invested heavily in updating production equipment, realizing central management of injection plant, building full automatic parts assembling line etc. The company has also put great emphasis on the construction of test lab, the Lab is able to finish performance checking by themselves for Waterproof, Flame Resistance, High-low Temp., Anti-corrosion, Impact resistance etc.

We are certified by ISO9001, and our products approved by UL, TUV, ATEX, UKCA, CE, IP68 RoHS and REACH successively.

The connectors we produced are widely applied to Communication equipment, Power facilities, Instrument & Apparatus and Medical appliance, the products is not just having very good market share of domestic sales, but also exported to Western Europe, North America, Japan and Korea, and became the appointed vendor of famous brand companies, such as Molex, Amphenol and Samsung etc.

R&R is willing to be the partner on your way towards success, looking forward to "Connect to source, bless the world" together with you !

ISO9001 TÜV IP68 RoHS REACH

R&R RONGWEI ELECTRIC 荣伟电气

50+台

产品专业生产设备

Professional production equipment

▲ 仓库 Warehouse

▲ 注塑车间 Injection workshop

20+台

产品专业检测设备

Professional testing equipment

▲ 自动装配车间 Automatic assembly workshop

02

Connect to source
Bless the world

生产车间
PRODUCTION WORKSHOP

Rongwei Electric
Co., LTD

荣伟电气有限公司
凭借先进的生产设备和检测手段
融入现代化企业的生产经营理念
以先进的产品
卓越的服务
合理的价位
为客户创造价值

Rongwei Electric Co.,Ltd.
With advanced production equipment and testing method,
Integrate into the production and management concept of mordern enterprise with advanced products,
Excellent service,
Reasonable price,
R&R creates the benefit for customers.

03

Connect to source
Bless the world

资质证书
QUALIFICATION CERTIFICATE

Rongwei Electric
Co., LTD

10+项

产品专业国际认证

More than 10 international certifications

R&R RONGWEI ELECTRIC 荣伟电气

CERTIFICATE OF COMPLIANCE

CERTIFICATE OF COMPLIANCE

ATTESTATION D'EXAMEN UE DE TYPE
EU TYPE EXAMINATION CERTIFICATE
LCIE19 ATEX 3084 X

CERTIFICATE

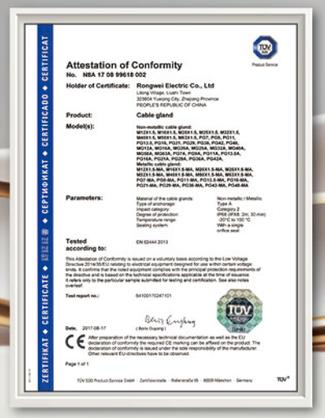
Attestation of Conformity

Attestation of Conformity

IQNet
THE INTERNATIONAL CERTIFICATION NETWORK
CERTIFICATE

SGS
Test Report (SVHC)

SGS
Test Report

04

Connect to source
Bless the world

ISO9001 cULus UK CA CE TÜV IP68 RoHS REACH

R&R RONGWEI ELECTRIC 荣伟电气

Waterproof Box Series
防水盒系列

A

01	RB-AG 开关防水盒	Junction box
03	RB-F 开关防水盒	Junction box
05	不锈钢搭扣防水盒	Stainless steel buckle waterproof box
07	RB-PCG 防水箱	Waterproof box
09	RB 黑色防水接线盒	Black waterproof junction box

Metal Waterproof Enclosure Series
金属防水箱系列

B

15	RBT 挂墙式金属防水箱	Wall Mounting Metal Waterproof Enclosure
17	RBB 不锈钢防水箱	Stainless steel Waterproof Enclosure

Cable Gland Series
电缆接头系列

C

19	CE 尼龙电缆接头	CE Nylon Cable Gland
20	UL 安全增强金属电缆接头	UL Reinforced Metal cable gland

CATALOG

Waterproof aviation connector series
防水航空插系列

D

21	防水航空插 / 解析图	Waterproof aviation connector/analytical diagram
23	SP13 防水航空插	Waterproof aviation connector
25	SP17 防水航空插	Waterproof aviation connector
27	SP21 防水航空插	Waterproof aviation connector
29	SP29 防水航空插	Waterproof aviation connector

Quick wire connector series
快速连接器系列

E

31	221 系列	Series
32	222 系列	Series
33	222-22MINI 系列	Series
34	222-2 系列	Series
35	222-22 系列	Series
36	分线系列	Branch series
39	2604 系列	Series
40	2604D 系列	Series
41	773-10 系列	Series
42	773-20-30 系列	Series
43	012 系列	Series
44	照明器具用连接器系列	Connector series for lighting appliances
45	导轨型系列	Guideway series
46	免破线系列	No break line series

产品目录
PRODUCT CATALOG

Rongwei Electric
Co., LTD

RB-AG开关防水盒
Junction box

防水盒 Waterproof box

单位Unit: mm

型号 Model number				尺寸 Dimension(高H×宽W×深D)
灰色盖子 ABS Grey lid	透明盖子 ABS/PC Transparent lid	灰色盖子 PC Grey lid	透明盖子 PC Transparent lid	
RB-AG-655055	RB-AT-655055	RB-PG-655055	RB-PT-655055	65×50×55
RB-AG-956555	RB-AT-956555	RB-PG-956555	RB-PT-956555	95×65×55
RB-AG-118045	RB-AT-118045	RB-PG-118045	RB-PT-118045	110×80×45
RB-AG-118070	RB-AT-118070	RB-PG-118070	RB-PT-118070	110×80×70
RB-AG-118085	RB-AT-118085	RB-PG-118085	RB-PT-118085	110×80×85
RB-AG-138070	RB-AT-138070	RB-PG-138070	RB-PT-138070	130×80×70
RB-AG-138085	RB-AT-138085	RB-PG-138085	RB-PT-138085	130×80×85
RB-AG-168055	RB-AT-168055	RB-PG-168055	RB-PT-168055	160×80×55
RB-AG-188065	RB-AT-188065	RB-PG-188065	RB-PT-188065	180×80×65
RB-AG-258065	RB-AT-258065	RB-PG-258065	RB-PT-258065	250×80×65
RB-AG-258085	RB-AT-258085	RB-PG-258085	RB-PT-258085	250×80×85
RB-AG-101075	RB-AT-101075	RB-PG-101075	RB-PT-101075	100×100×75
RB-AG-121275	RB-AT-121275	RB-PG-121275	RB-PT-121275	125×125×75
RB-AG-121210	RB-AT-121210	RB-PG-121210	RB-PT-121210	125×125×100
RB-AG-171275	RB-AT-171275	RB-PG-171275	RB-PT-171275	175×125×75
RB-AG-171210	RB-AT-171210	RB-PG-171210	RB-PT-171210	175×125×100
RB-AG-171495	RB-AT-171495	RB-PG-171495	RB-PT-171495	170×140×95
RB-AG-171710	RB-AT-171710	RB-PG-171710	RB-PT-171710	175×175×100
RB-AG-201510	RB-AT-201510	RB-PG-201510	RB-PT-201510	200×150×100
RB-AG-201513	RB-AT-201513	RB-PG-201513	RB-PT-201513	200×150×130
RB-AG-251510	RB-AT-251510	RB-PG-251510	RB-PT-251510	250×150×100
RB-AG-251513	RB-AT-251513	RB-PG-251513	RB-PT-251513	250×150×130
RB-AG-251775	RB-AT-251775	RB-PG-251775	RB-PT-251775	250×175×75
RB-AG-251710	RB-AT-251710	RB-PG-251710	RB-PT-251710	250×175×100
RB-AG-202095	RB-AT-202095	RB-PG-202095	RB-PT-202095	200×200×95
RB-AG-202013	RB-AT-202013	RB-PG-202013	RB-PT-202013	200×200×130
RB-AG-192813	RB-AT-192813	RB-PG-192813	RB-PT-192813	190×280×130
RB-AG-282813	RB-AT-282813	RB-PG-282813	RB-PT-282813	280×280×130
RB-AG-193813	RB-AT-193813	RB-PG-193813	RB-PT-193813	190×380×130

- **材质**：ABS/PC
- **防护等级**：IP66
- **特性**：轻便，耐腐蚀，绝缘性佳
- **适用于**：机场，地铁站，按钮盒，小型终端机，信号机箱，继电器，传感器，通信接线盒等设备

- **Material**: ABS/PC
- **Protection degree:** IP66
- **Product Feature**: portable, corrosion resisting, excellent insulation
- **Application:** It can be applied to pushbutton box,terminal box,signal box,relays box,sensor box and communication junction box and so on in airport, subway stooion

RB-F开关防水盒
Junction box

防水盒 Waterproof box

- **材质：** ABS
- **防护等级：** IP65
- **特性：** 轻便，耐腐蚀，绝缘性佳
- **适用于：** 机场，地铁站，按钮盒，小型终端机，信号机箱，继电器，传感器，通信接线盒等设备

- **Material:** ABS
- **Protection degree:** IP65
- **Product Feature:** portable，corrosion resisting，excellent insulation
- **Application:** It can be applied to pushbutton box,terminal box,signal box,relays box,sensor box and communication junction box and so on in airport，subway stooion

单位Unit: mm

型号 Model number	F系列ABS 宽/高/深 W/H/D
RB-F1	200×120×75
RB-F1-1T	200×120×113
RB-F1-2-TR	200×120×75
RB-F1-2R	200×120×75
RB-F1-3T	200×120×56
RB-F1-6R	200×120×67
RB-F1-T	200×120×75
RB-F10	320×240×110
RB-F10-1T	320×240×140
RB-F10-T	320×240×110
RB-F10-TL	320×240×60
RB-F10EH	320×240×155
RB-F10H	320×240×140
RB-F10L	320×240×60
RB-F11	380×260×105
RB-F11-3	380×260×70
RB-F11-3T	380×260×70
RB-F11-4	380×260×85
RB-F11-4T	380×260×85
RB-F11-T	380×260×105
RB-F11-TH	380×260×120
RB-F11-THE	380×260×140
RB-F11EH	380×260×140
RB-F11H	380×260×120
RB-F13-TR	162×81×65
RB-F13R	120×81×65
RB-F14	120×120×90
RB-F14-T	120×120×90
RB-F15	230×150×85
RB-F15-2R	230×150×87
RB-F15-2TR	230×150×87
RB-F15-T	230×150×85
RB-F15F	230×150×87
RB-F16	160×45×55
RB-F17	150×70×47
RB-F17-T	150×70×47
RB-F19-1	83×58×33
RB-F19-1T	83×58×33
RB-F19-TR	83×58×33
RB-F19R	83×58×33
RB-F1H	200×120×113
RB-F1L	200×120×56
RB-F2	158×90×60
RB-F2-2-TR	158×90×64
RB-F2-2R	158×90×64
RB-F2-T	158×90×60
RB-F20	63×58×35
RB-F20-2R	63×58×35
RB-F20-2TR	63×58×35
RB-F20-T	63×58×35
RB-F21	240×160×90

型号 Model number	F系列ABS 宽/高/深 W/H/D
RB-F21-1T	240×160×120
RB-F21-T	240×160×90
RB-F21H	240×160×120
RB-F22	160×110×90
RB-F22-2R	160×110×90
RB-F22-2TR	160×110×90
RB-F22-T	160×110×90
RB-F24	192×188×100
RB-F24-2R	192×188×70
RB-F24-2TR	192×188×70
RB-F24-T	192×188×100
RB-F25	83×81×56
RB-F25-T	83×81×56
RB-F2L	158×90×40
RB-F2L-T	158×90×40
RB-F3	115×90×55
RB-F3-2R	115×90×55
RB-F3-2TR	115×90×55
RB-F3-3R	115×90×70
RB-F3-3TR	115×90×70
RB-F3-T	115×90×55
RB-F34	290×210×60
RB-F34T	290×210×60
RB-F36	290×210×100
RB-F36T	290×210×100
RB-F4	100×68×50
RB-F4-1R	100×68×40
RB-F4-1TR	100×68×40
RB-F4-2R	100×68×50
RB-F4-2TR	100×68×50
RB-F4-T	100×68×50
RB-F5	160×160×90
RB-F5-2R	160×160×90
RB-F5-2TR	160×160×90
RB-F5-T	160×160×90
RB-F50	300×280×140
RB-F50T	300×280×140
RB-F6	263×182×95
RB-F6-1T	263×182×125
RB-F6-T	263×182×95
RB-F6-TL	263×182×60
RB-F6H	263×182×125
RB-F6L	263×182×60
RB-F7-1R	158×90×60
RB-F7-TR	158×90×46
RB-F7R	158×90×46
RB-F8-TR	115×85×35
RB-F8R	115×85×35
RB-F9	280×195×135
RB-F9L	280×195×86

不锈钢搭扣防水盒
Stainless steel buckle waterproof box

防水盒 Waterproof box

- **材质：** ABS/PC
- **防护等级：** IP66
- **特性：** 轻便，耐腐蚀，绝缘性佳
- **适用于：** 机场，地铁站，按钮盒，小型终端机，信号机箱，继电器，传感器，通信接线盒等设备

- **Material:** ABS/PC
- **Protection degree:** IP66
- **Product Feature:** portable，corrosion resisting，excellent insulation
- **Application:** It can be applied to pushbutton box,terminal box,signal box,relays box,sensor box and communication junction box and so on in airport，subway stooion

单位Unit: mm

搭扣NPG/T系列 Series	PC灰盖 Ash lid	PC透明盖 Transparent cover
150×100×90	RB-NPG-151090	RB-NPT-151090
175×125×90	RB-NPG-171290	RB-NPT-171290
150×150×90	RB-NPG-151590	RB-NPT-151590
210×160×100	RB-NPG-211610	RB-NPT-211610
210×210×130	RB-NPG-212113	RB-NPT-212113
275×175×110	RB-NPG-271713	RB-NPT-271713
280×190×140	RB-NPG-281914	RB-NPT-281914
300×200×130	RB-NPG-302013	RB-NPT-302013
300×200×170	RB-NPG-302017	RB-NPT-302017
300×300×150	RB-NPG-303015	RB-NPT-303015
380×280×140	RB-NPG-382814	RB-NPT-382814
350×250×150	RB-NPG-352515	RB-NPT-352515
400×300×170	RB-NPG-403017	RB-NPT-403017
430×330×180	RB-NPG-433318	RB-NPT-433318
530×430×200	RB-NPG-534320	RB-NPT-534320
630×430×230	RB-NPG-634323	RB-NPT-634323
600×500×220	RB-NPG-605022	RB-NPT-605022
730×530×250	RB-NPG-735325	RB-NPT-735325
830×630×280	RB-NPG-836328	RB-NPT-836328

RB-PCG防水箱
Waterproof box

防水盒 Waterproof box

- 材质：高强度PC
- 防护等级：IP66
- 抗冲击力：IK08
- 适用于：T端子箱，配电板，仪器仪表盒，信号箱等设备。

- **Material:** High strength PC
- **Protection degree:** IP66
- **Impact resistance:** IK08
- **Applicable to:** T terminal box, switchboard, Instrument box, signal box and other equipment.

PC 料灰盖 PC GRAY COVER

单位Unit: mm

型号 Model number	尺寸 Dimension(高H×宽W×深D)	备注 Remark
RB-PCG-203017	200×300×170	二个搭扣two buckless
RB-PCG-304017	300×400×170	
RB-PCG-405020	400×500×200	三个搭扣three buckless
RB-PCG-406022	400×600×220	

PC 料透明盖 PC TRANSPRENT COVER

单位Unit: mm

型号 Model number	尺寸 Dimension(高H×宽W×深D)	备注 Remark
RB-PCT-203017	200×300×170	二个搭扣two buckless
RB-PCT-304017	300×400×170	
RB-PCT-405020	400×500×200	三个搭扣three buckless
RB-PCT-406022	400×600×220	

金属底板 / 塑料底板 GALVANIZED BASEPLATE/PLASTIC

配件 ACCESSORY

型号 Model number	尺寸 Dimension(高H×宽W×深D)	备注 Remark
RB-302017	169x273X2	金属板/塑料板 Metal plate/plastic plate
RB-403017	269x372X2	
RB-504020	368x472X2	
RB-604022	368x572X2	

镀锌中间门板 GALVANIZED MIDDLE DOOR

配件 ACCESSORY

型号 Model number	尺寸 Dimension(高H×宽W×深D)	备注 Remark
RB-302017	171x271X2	金属板/塑料板 Metal plate/plastic plate
RB-403017	271x371X2	
RB-504020	371x471X2	
RB-604022	371x571X2	

RB黑色防水接线盒
Black waterproof junction box

防水盒 Waterproof box

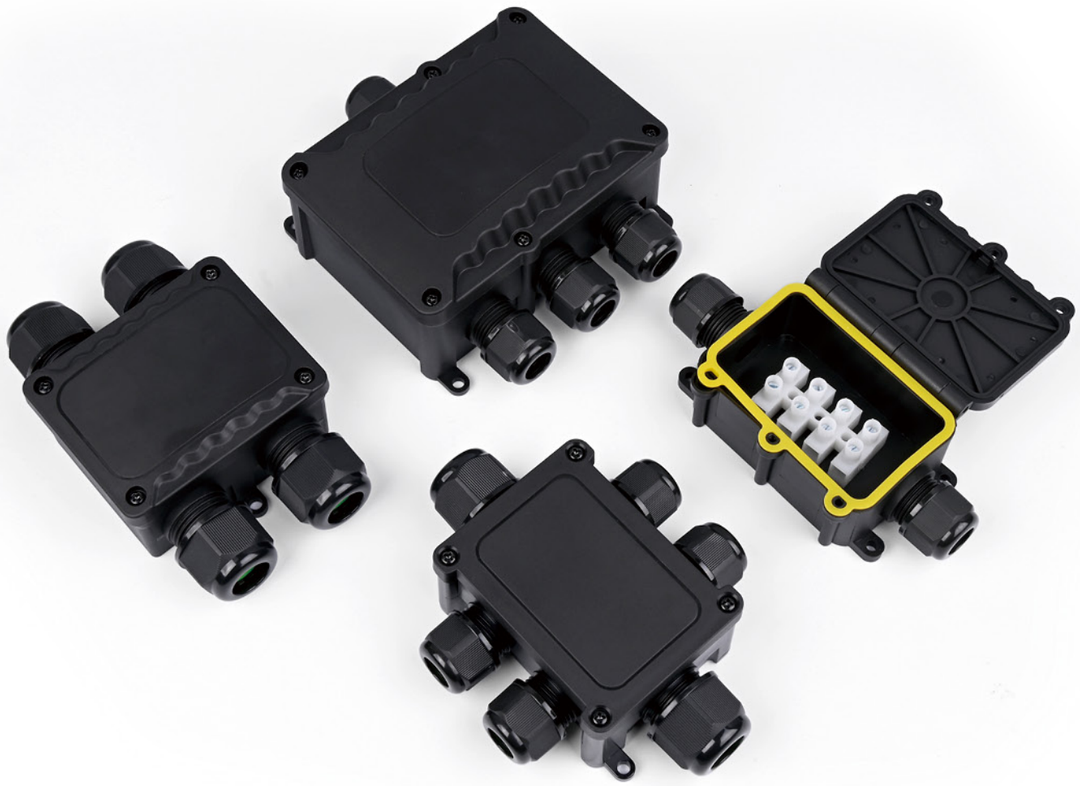

产品概述 Product overview

2通至10通IP68防水接线盒可以作为外部接线盒水平和垂直安装。一体成型的垫圈保证了安装的安全性。顶部盖子和底部之间的连接简化了安装过程。只需要连接相同类型的电线，不需要切割电缆，更方便，更安全。保护性和紧凑性使其具有最大的通用

性，接线盒通过了IP68认证，无需使用树脂或凝胶即可保证防水防尘的最高需求。接线盒适用于各种加油站，矿山，加工厂，灌溉，农业和栽培，温室，水处理，监控，潜水泵，能源分配。由优质塑料制成，在阳光下不会开裂或褪色，经久耐用，可使用多年。

The IP68 waterproof junction box with 2 to 10 ways can be mounted horizontally and vertically as an external junction box. One piece washer ensures the safety of the installation. The connection between the top cover and the bottom simplifies the installation process. Only connect the same type wires, then no need to cut the cable, which is more convenient and safer. Protection and compactness make it the most versatile product.

The junction box has been obtained the IP68 certification, ensuring the highest requirements for water and dust resistance when without use of resins or glue. The junction box is applied to various scenarios, such as gas stations, mines, processing plants, irrigation systems, agriculture and cultivation, greenhouses, water treatment facilities, monitoring systems, submersible pumps, and power distribution etc. Made of high-quality plastic, it will not crack or fade under the sun, it's durable, and last for years.

RB-8270-3T

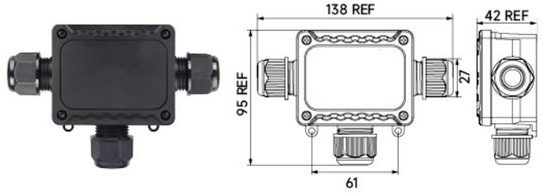

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M25*3: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-11985

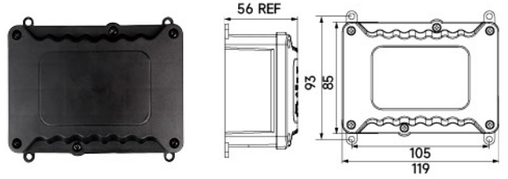

- 电缆接头的数量和尺寸可根据客户要求定制
- The number and size of cable joints can be customized according to customer requirements

RB-8270-4H

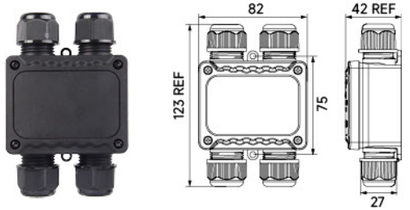

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M25*4: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-11958-4T

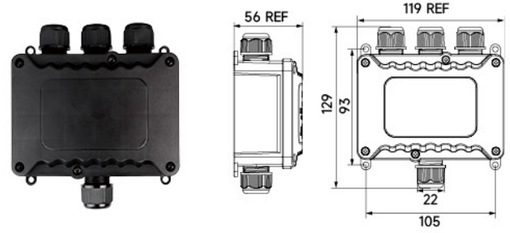

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*4: 5-9mm, 9-12mm,
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8270-3Y

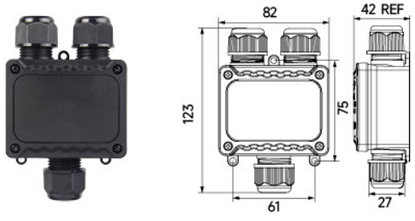

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M25*3: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-11985-10T

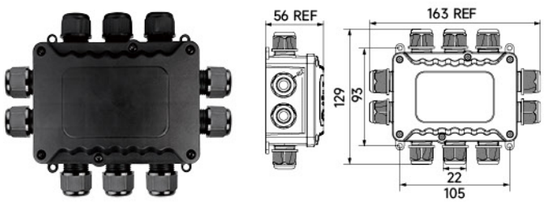

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*10: 5-9mm, 9-12mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB黑色防水接线盒
Black waterproof junction box

防水盒 Waterproof box

RB-8266-2

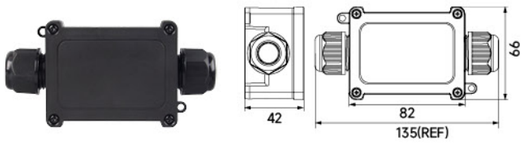

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8266-3

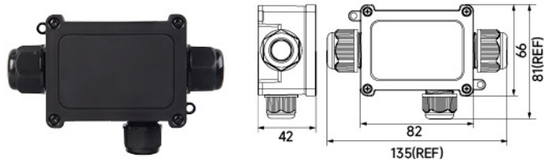

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*1: 5-9mm, 9-12mm
  M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-2

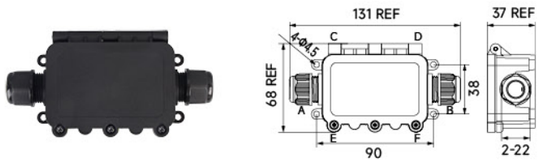

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-3T

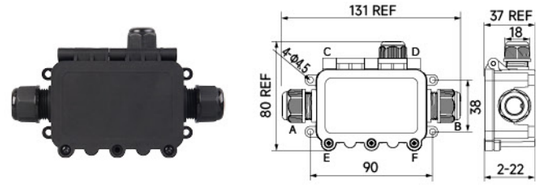

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M16:*1: 3.5-7mm, 7-10mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8266-4

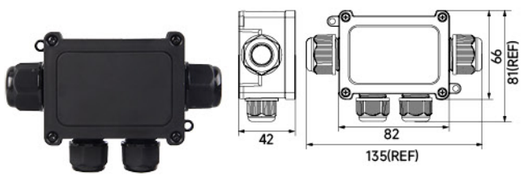

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm,
  M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8266-4X

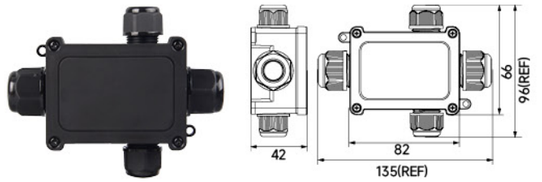

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-4T

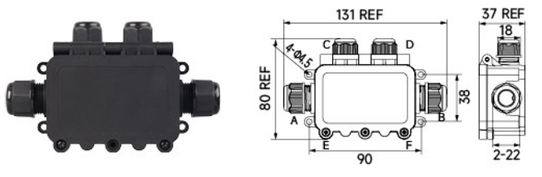

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M16*2: 3.5-7mm, 7-10mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-4X

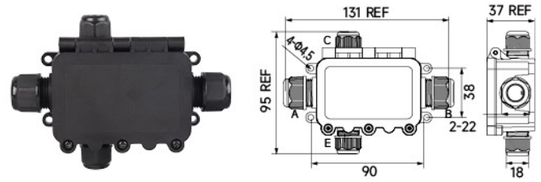

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M16*2: 3.5-7mm, 7-10mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8266-5

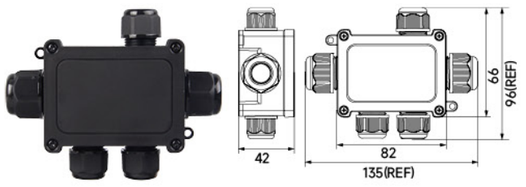

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*3: 5-9mm, 9-12mm,
  M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-8266-6

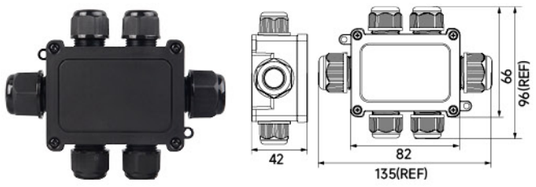

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Rated current：0.5-6mm²
- 外线直径 Outer diameter：M20*4: 5-9mm, 9-12mm
  M25*2: 5-9mm, 9-12mm, 10-14mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-5

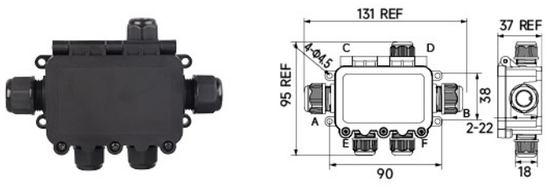

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M16*3: 3.5-7mm, 7-10mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB-4572-6

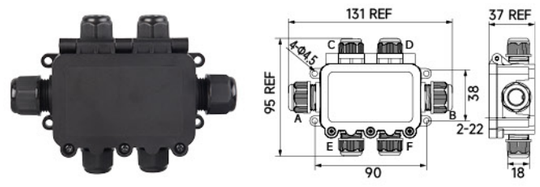

- 额定电压 Rated voltage：450V
- 额定电流 Rated current：40A
- 线平方数 Line squared number：0.5~6mm²
- 外线直径 Outer diameter：M20*2: 5-9mm, 9-12mm
  M16*4: 3.5-7mm, 7-10mm
- 温度范围 Temperature range：-40°C~+105°C
- 防护等级 Protection degree：IP68

RB黑色防水接线盒
Black waterproof junction box

防水盒 Waterproof box

注：707/708 接头需另外选配（PG9、M16、M20、M25）
Note: Connectors need to be selected separately

RB-707-2



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：57A
- 线平方数 Rated current：0.2-6mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP66

RB-708



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Rated current：0.5-4mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-707-3



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：57A
- 线平方数 Rated current：0.2-6mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP66

RB-708-2



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Rated current：0.5-4mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-707-4



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：57A
- 线平方数 Rated current：0.2-6mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP66

RB-708-8



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Rated current：0.5-4mm²
- 外线直径 Outer diameter：PG9：4-8mm　M16:5-10mm
  (选配 Optional)　M20：10-14mm　M25:13-18mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

注：图中标注留孔孔位 M16
Note: The hole position M16 is marked in the figure

RB-709-2 (含左右黑色接头)

Includes left and right black connectors



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Line squared number：0.5-4mm²
- 外线直径 Outer diameter：3-6mm，4-8mm，7-10mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-709-4 (含4个接头)

Includes 4 connectors



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Line squared number：0.5-4mm²
- 外线直径 Outer diameter：3-6mm，4-8mm，7-10mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-709-2/4 (含左右黑色接头)

Includes left and right black connectors



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Line squared number：0.5-4mm²
- 外线直径 Outer diameter：3-6mm，4-8mm，7-10mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-709-6 (含6个接头)

Includes 6 connectors



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Line squared number：0.5-4mm²
- 外线直径 Outer diameter：3-6mm，4-8mm，7-10mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RB-709-2/6 (含左右黑色接头)

Includes left and right black connectors



- 额定电压 Rated voltage：450V
- 额定电流 Rated current：24/32A
- 线平方数 Line squared number：0.5-4mm²
- 外线直径 Outer diameter：3-6mm，4-8mm，7-10mm
- 温度范围 Temperature range：-40°C~+110°C
- 防护等级 Protection degree：IP68

RBT挂墙式金属防水箱
Wall Mounting Metal Waterproof Enclosure

金属防水箱 Metal Waterproof Enclosure

- **材质：**冷轧钢板，喷漆/镀锌底板
- **表面处理：**热固粉末涂层，波纹饰板
- **防护等级：**IP66
- **抗冲击力：**IK10
- **颜色：**RAL7032/RAL7035
- **温度范围：**-40°C- 80°C

- **Material:** cold-rolled steel,painted/galvanized sheet
- **Surface treatment:** thermosetting power coating,corrugate finish
- **Protection degree:** IP66
- **Impact resistance:** IK10
- **Color:** RAL7032/RAL7035
- **Temperature range:** -40°C- 80°C

单位Unit: mm

型号 Model number	尺寸 dimension(高H×宽W×深D)	型号 Model number	尺寸 dimension(高H×宽W×深D)
RBT202015	200×200×150	RBT604015	600×400×150
RBT252015	250×200×150	RBT604020	600×400×200
RBT302015	300×200×150	RBT604025	600×400×250
RBT302020	300×200×200	RBT604030	600×400×300
RBT302520	300×250×200	RBT605015	600×500×150
RBT303015	300×300×150	RBT605020	600×500×200
RBT303020	300×300×200	RBT605025	600×500×250
RBT303025	300×300×250	RBT605030	600×500×300
RBT403015	400×300×150	RBT606015	600×600×150
RBT403020	400×300×200	RBT606020	600×600×200
RBT403025	400×300×250	RBT606025	600×600×250
RBT404015	400×400×150	RBT704020	700×400×200
RBT404020	400×400×200	RBT704030	700×400×300
RBT404025	400×400×250	RBT705015	700×500×150
RBT503015	500×300×150	RBT705020	700×500×200
RBT503020	500×300×200	RBT705025	700×500×250
RBT503030	500×300×300	RBT706020	700×600×200
RBT504015	500×400×150	RBT706025	700×600×250
RBT504020	500×400×200	RBT806020	800×600×200
RBT504025	500×400×250	RBT806025	800×600×250
RBT504030	500×400×300	RBT806030	800×600×300
RBT505015	500×500×150	RBT808020	800×800×200
RBT505020	500×500×200	RBT808025	800×800×250
RBT505025	500×500×250	RBT808030	800×800×300

产品特点

PU发泡密封条确保箱体达到IP66的防护等级

各种类型及尺寸的凸台确保进出线方便

镀锌安装板也可在箱体外做布线用

箱口多层保护槽不但起加固作用而且能

防止门板打开时脏物和水进入箱内带双齿锁芯的专业锁系统

开和关都极为便捷

可定制非标产品
Nonstandard products are customizable

Features of products

PU foaming sealing strip ensures a protection grade of IP66 to box

Bosses of various types and sizes allow easy installation of inlet/outlet lines

Galvanized mounting plate can also be used for wiring outside the box

Multiple protection grooves are designed at the box opening can not only reinforce the structure but also prevent the entry of dirt or water when the door is opened Professional lock system with double-teeth cylinder allows

easy locking/unlocking

RBB不锈钢防水箱
Stainless steel Waterproof Enclosure

金属防水箱 Metal Waterproof Enclosure

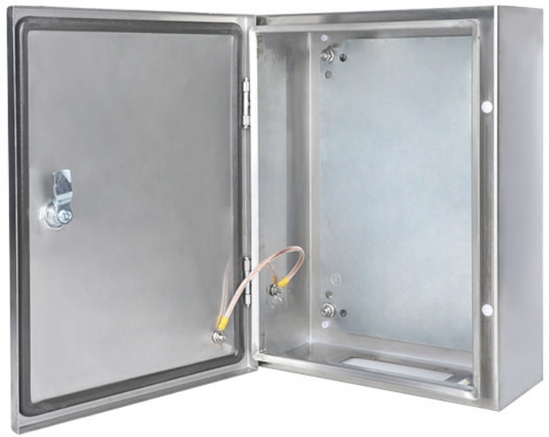

单位Unit: mm

型号 Model number	尺寸 Dimension(高H×宽W×深D)
RBB202015	200×200×150
RBB302015	300×200×150
RBB302520	300×250×200
RBB403015	400×300×150
RBB403020	400×300×200
RBB403025	400×300×250
RBB404015	400×400×150
RBB404025	400×400×250
RBB504020	500×400×200
RBB504025	500×400×250
RBB505020	500×500×200

型号 Model number	尺寸 Dimension(高H×宽W×深D)
RBB505025	500×500×250
RBB604020	600×400×200
RBB604025	600×400×250
RBB605020	600×500×200
RBB605025	600×500×250
RBB605030	600×500×300
RBB705020	700×500×200
RBB705025	700×500×250
RBB806020	800×600×200
RBB806025	800×600×250
RBB806030	800×600×300

- **材质：** SUS304(其他材料可选)
- **表面处理：** 拉丝处理
- **防护等级：** IP66
- **抗冲击力：** IK10
- **温度范围：** -40°C- 80°C

- **Material:** SUS304(other material are optional)
- **Surface treatment:** wiredrawing
- **Protection degree:** IP66
- **Impact resistance:** IK10
- **Temperature range:** -40°C to 80°C



产品特点

PU发泡密封条确保箱体达到IP66的防护等级

各种类型及尺寸的凸台确保进出线方便

镀锌安装板也可在箱体外做布线用

箱口多层保护槽不但起加固作用而且能

防止门板打开时脏物和水进入箱内带双齿锁芯的专业锁系统

开和关都极为便捷

可定制非标产品

Nonstandard products are customizable

Features of products

PU foaming sealing strip ensures a protection grade of IP66 to box

Bosses of various types and sizes allow easy installation of inlet/outlet lines

Galvanized mounting plate can also be used for wiring outside the box

Multiple protection grooves are designed at the box opening can not only reinforce the structure but also prevent the entry of dirt or water when the door is opened Professional lock system with double-teeth cylinder allows

easy locking/unlocking

CE 尼龙电缆接头
CE Nylon Cable Gland

RONGWEI ELECTRIC 荣伟电气

电缆接头 Cable Gland

- **材质:** 采用UL认可的尼龙PA材料
- **防水圈:** 丁腈橡胶
- **平垫圈:** 丁腈橡胶
- **防护等级:** IP68
- **工作温度:** 静态：-40°C到100°C，短时间达120°C
  动态：-20 °C到80°C，短时间达100°C
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001)，
  特殊颜色可定做

- **Material:** UL approved nylon PA
- **Seal:** NBR
- **Flat washer:** NBR
- **Protection degree:** IP68
- **Temperature:** Static state: -40°C to 100°C, short time to 120°C;
  Dynamic state: -20°C to 80°C, short time to 100°C
- **Color:** Black(RAL9005), light grey(RAL7035), silver(RAL7001) as
  well as special colors that can be customized

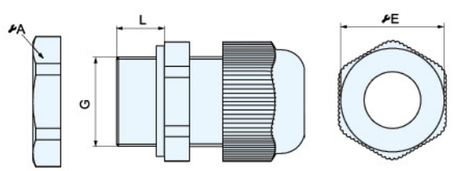

单位 Unit：mm

编码(PG/M) Code	螺纹规格 Thread Size	适用电缆Φ Cable Range	螺纹外径 Thread O. D. G	螺纹长度 Thread Length L	长螺纹 Long Thread L	扳手直径 Spanner Size A & E	数量/袋 Qty/bag
RND-PG7-6.5	PG7	4-6.5	12.5	9	15	19/16	100
RND-PG9-8.5	PG9	4.5-8.5	15.2	9	15	22/19	100
RND-PG11-10	PG11	5-10	18.6	9	15	24/22	100
RND-PG13.5-11	PG13.5	6-11	20.4	10	15	26/24	100
RND-PG16-13	PG16	8-13	22.5	10	15	30/27	100
RND-PG21-18	PG21	13-18	28.3	12	15	36/33	100
RND-PG29-25	PG29	18-25	37	12	15	46/42	50
RND-PG36-32	PG36	23-32	47	15	18	56/52	20
RND-PG42-38	PG42	30-38	54	18	20	65/60	20
RND-PG48-44	PG48	37-44	59.3	18	20	69/68	20
RND-PG63-51	PG63	42-51	70	30	/	82/77	10
RND-M12-6.5	M12x1.5	4-6.5	12	9	15	17/16	100
RND-M16-8.5	M16x1.5	4.5-8.5	16	9	15	22/19	100
RND-M18-10	M18x1.5	5-10	18	9	15	24/22	100
RND-M20-11	M20x1.5	6-11	20	10	15	27/24	100
RND-M22-13	M22x1.5	8-13	22	10	15	29/27	100
RND-M25-18	M25x1.5	13-18	25	12	15	33/33	100
RND-M32-21	M32x1.5	16-21	32	12	15	41/36	50
RND-M40-27	M40x1.5	20-27	40	15	18	51/46	20
RND-M50-38	M50x1.5	30-38	50	18	20	61/60	20
RND-M63-44	M63x1.5	37-44	63	18	20	71/68	20

UL 安全增强金属电缆接头
UL Reinforced Metal cable gland

电缆接头 Cable Gland

- **材质:** 黄铜镀镍
- **夹紧件:** 采用UL认可的PA材料
- **O型圈:** 丁腈橡胶，可选平垫圈替代
- **防水圈:** 丁腈橡胶
- **防水等级:** IP68
- **工作温度:** 静态：-40°C到100°C，短时间达120°C
  动态：-20°C到80°C，短时间达100°C

- **Material:** Nickel-plated brass
- **Claw:** UL approved nylon PA
- **O-Ring:** NBR, flat washer is available
- **Seal:** NBR
- **Protection degree:** IP68
- **Temperature:** Static state: -40°C to 100°C, short time to 120°C;
  Dynamic state: -20°C to 80°C, short time to 100°C

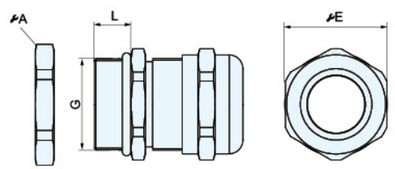

单位 Unit：mm

编码(P/N) Code	螺纹规格 Thread Size	适用电缆Φ Cable Range	螺纹外径 Thread O. D. G	螺纹长度 Thread Length L	长螺纹长度 Long Thread Length L	扳手直径 Spanner Size A & E
RMAU-PG7	PG7	4~7	12.5	6	10	14
RMAU-PG9	PG9	5~8	15.2	7	10	18
RMAU-PG11	PG11	6~10	18.6	8	10	20
RMAU-PG13.5	PG13.5	6~12	20.4	9	10	22
RMAU-PG16	PG16	7~14	22.5	9	10	24
RMAU-PG21	PG21	13~18	28.3	9	12	30
RMAU-PG29	PG29	14~24	37	10	12	40
RMAU-PG36	PG36	25~32	47	10	15	50
RMAU-PG42	PG42	32~38	54	14	15	58
RMAU-PG48	PG48	34~44	59.3	12	15	64
RMAU-M12	M12x1.5	4~7	12	6	10	14
RMAU-M16	M16x1.5	5~8	16	7	10	18
RMAU-M18	M18x1.5	6~10	18	8	10	20
RMAU-M20	M20x1.5	6~12	20	8	10	22
RMAU-M22	M22x1.5	7~14	22	9	10	24
RMAU-M25	M25x1.5	13~18	25	7.5	15	27/30
RMAU-M32	M32x1.5	18~25	32	8	15	34/40
RMAU-M40	M40x1.5	22~32	40	12	15	45/50
RMAU-M50	M50x1.5	32~38	50	10	15	58
RMAU-M63	M63x1.5	34~44	63	13	15	68/64



防水航空插 waterproof aviation connector

产品概述 Product overview

防水航空插系列凭借丰富的多样性选择，为电气连接需求提供了全面解决方案，涵盖标准电缆插头、弯式电缆插头、对接插座、后螺母插座、两孔法兰插座及方形法兰插座等型号。这些连接器通过同系列芯数匹配与创新的锁紧机制，确保了精准稳固且耐用的电气连接，特别适应高湿度、尘土或振动等恶劣环境，有效防水，保障电气系统安全稳定运行，适配于不同电气应用场景。

With a wide variety of options, the waterproof aviation plug series provides a comprehensive solution for electrical connection needs, including standard cable plugs, bent cable plugs, butt sockets, rear nut sockets, two-hole flange sockets and square flange sockets. Through the same series of core number matching and innovative locking mechanism, these connectors ensure accurate, stable and durable electrical connections, especially suitable for harsh environments such as high humidity, dust or vibration, effective waterproof, ensure the safe and stable operation of electrical systems, and adapt to different electrical application scenarios.

材料和技术参数 Material and technical parameters

接插方式 Connection mode	螺纹锁紧 Thread locking
外壳材料 Housing material	热塑性塑料 Thermoplastic PC, PA66 防火等级 Fire rating： V-0
绝缘体 Insulator	热塑性塑料 Thermoplastic PPS, 耐高温 High temperature resistance 260°C
接触件材料 Contact material	铜镀金 Brass with gold-plated
接线方式 Wiring mode	焊接 Welding： SP13、 SP17、SP21、SP29 压接 Crimping：SP17、SP21、SP29 螺丝压接 Screw crimping：SP21、SP29(Φ2.5、Φ3、Φ3.5mm 插针 Pin)
电缆直径 Cable diameter	SP11：4-6.5 SP13 I：4-6.5mm (不标 No mark), II：5-8mm SP17：6-10mm SP21 I：4.5-7mm, II：7-12mm (不标 No mark) SP29：13-16mm
防护等级 Protection grade	IP68
接插次数 Plugging times	500
温度范围 Temperature range	-40°C~+85°C
绝缘电阻 Insulation resistance	2000MΩ

防水航空插 waterproof aviation connector

电缆插头于SP1311、SP3112、SP1313适配
Cable plug match with SP1311、SP3112、SP1313

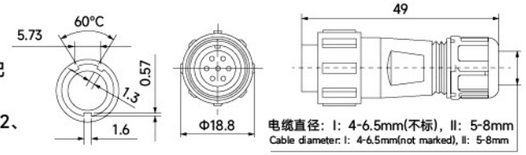

SP1310/ P
插针 Pin

SP1310/ S
电缆外径 Cable outer diameter
芯数 Number of cores
插孔 Socket

SP1312/P

SP1312/S

后螺母插座
与SP1310适配
Rear nut socket match with SP1310

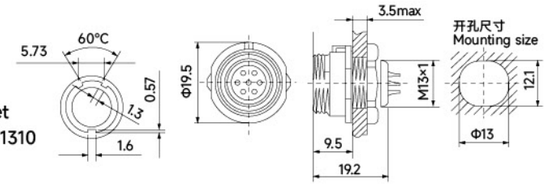

电缆对接插座
与SP1310适配
Cable butt socket match with SP1310

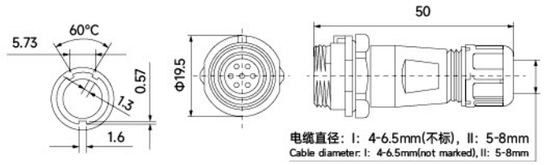

SP1311/P

SP1311/S

SP1313/P

SP1313/S

法兰插座
与SP1310适配
Flange socket match with SP1310

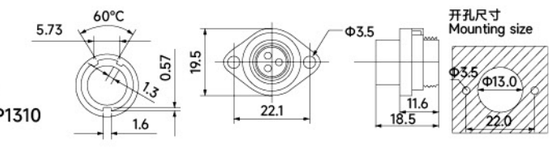

焊接芯件参数表　Welding core parameters table

芯数 Number of cores	2	3	4		5	6	7	9
公端绝缘体正面图 Front view of male insulator								
额定电流 Rated current(A)	13	13	5		5	5	5	3
接触件直径 Contact diameter(mm)	Φ1.6×2	Φ1.6×3	Φ1×4		Φ1×5	Φ1×6	Φ1×7	Φ0.7×9
工作电压 Operating voltage(AC.V)	250	250	200		180	125	125	125
耐压 Withstand voltage(AC.V)1min	1500	1500	1500		1000	1000	1000	1000
接触电阻 Contact resistance(mΩ)	2.5	2.5	5		5	5	5	10
线规 Wire gauge(mm^2/AWG)	≤2/14	≤2/14	≤0.75/18		≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20



防水航空插 waterproof aviation connector

电缆插头
与 SP1711、SP1712、
SP1713、SP1714
SP1715 相配
Cable plag math with
SP1711、SP1712、SP1713、
SP1714、SP1715





SP1710/ P

SP1710/ S

插针 Pin

1：焊接(不标)Welding(not marked)，3：压接 Crimping
芯数 Number of cores
插孔 Socket

SP1712/P

SP1712/S

后螺母插座
与 SP1710、SP1716 相配
Rear nut socket match
with SP1710、SP1716

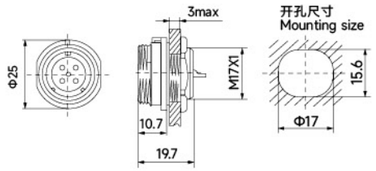

电缆对接插座
与 SP1710、SP1716相配
Cable butt socket match
with SP1710、SP1716





SP1711/P

SP1711/S

SP1713/P

SP1713/S

螺丝插座与
SP1710、SP1716相配
Screw socket match with
SP1710、SP1716

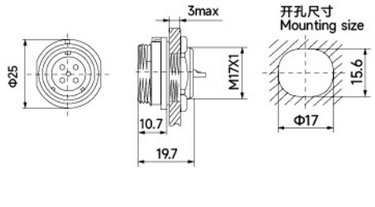

焊接芯件参数表　Welding core parameters table

芯数 Number of cores	2	3	4		5	7	9	10
公端绝缘体正面图 Front view of male insulator								
额定电流 Rated current(A)	10	10	5		5	5	5	5
接触件直径 Contact diameter(mm)	Φ1.5×2	Φ1.5×3	Φ1×4		Φ1×5	Φ1×7	Φ1×9	Φ1×10
工作电压 Operating voltage(AC.V)	500	500	500		500	400	400	400
耐压 Withstand voltage(AC.V)1min	1500	1500	1500		1500	1200	1200	1200
接触电阻 Contact resistance(mΩ)	2.5	2.5	5		5	5	5	5
线规 Wire gauge(mm^2/AWG)	≤2/14	≤2/14	≤0.75/18		≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18

防水航空插 waterproof aviation connector

电缆插头与SP2111、SP2112、SP2113、SP2114、SP2115 相配
Cable plug match with SP2111、SP2112、SP2113、SP2114、SP2115

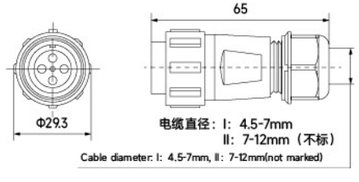

SP2110/ P
插针 Pin

SP2110/ S
1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
电缆外接 Cable external connection
芯数 Number of cores
插孔 Socket

SP2111/P　　SP2111/S

电缆对接插座
与 SP2110，SP2116相配
Cable butt socket match with SP2110、SP2116

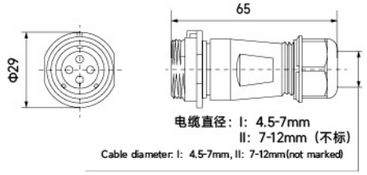

SP2112/P

后螺母插座
与 SP2110、SP2116 相配
Rear nut socket match with SP2110、SP2116

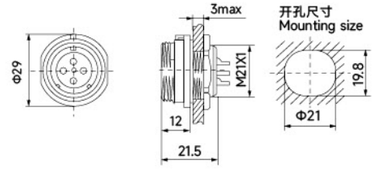

SP2112/S
1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
芯数 Number of cores

SP2113/P

螺丝插座
与SP2110,SP2116相配
Screw socket match with SP2110、SP2116

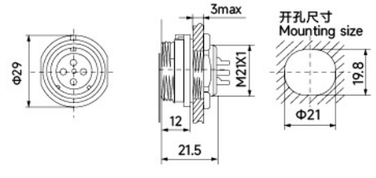

SP2113/S
1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
芯数 Number of cores

焊接芯件参数表　Welding core parameters table

芯数 Number of cores	2	3	4	5	7	9	12
公端绝缘体正面图 Front view of male insulator							
额定电流 Rated current(A)	30 | 20	30 | 20	30 | 20	30 | 20	15	5	5
接触件直径 Contact diameter(mm)	Φ3×2	Φ3×3	Φ3×4	Φ3×5	Φ2×7	Φ1×9	Φ1×12
工作电压 Operating voltage(AC.V)	500	500	500	500	500	400	400
耐压 Withstand voltage(AC.V)1min	1500	1500	1500	1500	1500	1500	1200
接触电阻 Contact resistance(mΩ)	1	1	1	1	2.5	5	5
接线方式 Connection mode	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接 Welding	焊接 Welding
焊接线规 Welding wire gauge(mm^2/AWG)	≤4/12	≤4/12	≤4/12	≤4/12	≤2/14	≤0.75/18	≤0.75/18
螺丝压接线规 Screw crimping wire gauge (mm^2/AWG)	≤1.5/15	≤1.5/15	≤1.5/15	≤1.5/15	/	/	/

防水航空插 waterproof aviation connector

电缆插头与 SP2911、SP2912
SP2913、SP2914、SP2915相配
Cable plug match with
SP2911、SP2912、
SP2913、SP2914、SP2915



SP2910/ P　　SP2910/ S

- 插针 Pin
- 1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
- 电缆外接 Cable external connection
- 芯数 Number of cores
- 插孔 Socket

后螺母插座
与SP2910,SP2916 相配
Rear nut socket match
with SP2910、SP2916

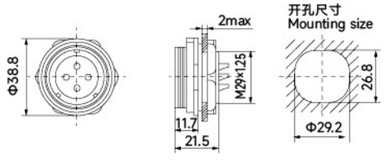

SP2912/P　　SP2912/S

- 1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
- 芯数 Number of cores

电缆对接插座
与 SP2910，SP2916相配
Cable butt socket match
with SP2910、SP2916

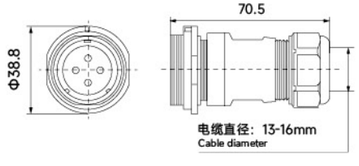

SP2911/P　　SP2911/S

螺丝插座
与 SP2910、SP2916相配
Screw socket match
with SP2910、SP2916

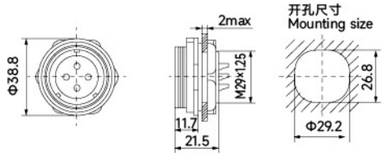

SP2913/P　　SP2913/S

- 1：焊接(不标)Welding(not marked), 2：螺丝压接 Screw crimping, 3：压接 Crimping
- 芯数 Number of cores

焊接芯件参数表　Welding core parameters table

芯数 Number of cores	2	3	4	5	7	9	12
公端绝缘体正面图 Front view of male insulator							
额定电流 Rated current(A)	30 | 20	30 | 20	30 | 20	30 | 20	15	5	5
接触件直径 Contact diameter(mm)	Φ3×2	Φ3×3	Φ3×4	Φ3×5	Φ2×7	Φ1×9	Φ1×12
工作电压 Operating voltage(AC.V)	500	500	500	500	500	400	400
耐压 Withstand voltage(AC.V)1min	1500	1500	1500	1500	1500	1500	1200
接触电阻 Contact resistance(mΩ)	1	1	1	1	2.5	5	5
接线方式 Connection mode	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接/螺丝压接 Welding/screw crimping	焊接 Welding	焊接 Welding
焊接线规 Welding wire gauge(mm^2/AWG)	≤4/12	≤4/12	≤4/12	≤4/12	≤2/14	≤0.75/18	≤0.75/18
螺丝压接线规 Screw crimping wire gauge (mm^2/AWG)	≤1.5/15	≤1.5/15	≤1.5/15	≤1.5/15	/	/	/

221 系列
Series

R&R RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized



221-612



221-613



221-615



221-412



221-413

221-414



221-415

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，3，4，5线连接器
- 可轻松连接截面积介于0.2-4.0 mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2, 3, 4, and 5-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.2-4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
221-412	2	250V	32A	0.2-4.0mm² 24-12AWG	0.2-4.0mm² 24-12AWG	11 mm / 0.43 inches	外壳 Shell：PC 手柄 Handle：PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
221-413	3						
221-414	4						
221-415	5						
221-612	2	250V	40A	0.5-6.0mm² 20-10AWG	0.5-6.0mm² 20-10AWG	14 mm / 0.55 inches	
221-613	3						
221-615	5						

222 系列
Series

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized



222-412

222-413



222-414



222-415



222-418



222-612



222-613

222-615

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，3，4，5，8线连接器
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2, 3, 4, 5, 8-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
222-412	2	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
222-413	3						
222-414	4						
222-415	5						
222-418	8						
222-612	2	250V	35A	0.5-6.0mm² 20-10AWG	0.5-6.0mm² 20-10AWG	12 mm / 0.47 inches	
222-613	3						
222-615	5						



222-22MINI 系列
Series

RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized

D2-2



D3-3

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供4，6线连接器
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 4, 6-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
D2-2	4	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 手柄 Handle：PC 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
D3-3	6						

222-2 系列
Series

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized

222-222



222-223



222-224



222-225

222-211 可任意拼接拆卸
Can be arbitrarily spliced and disassembled

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，4，6，8，10线连接器
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2, 4, 6, 8, and 10-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
222-211	2	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
222-222	4						
222-223	6						
222-224	8						
222-225	10						

222-22 系列
Series

RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized

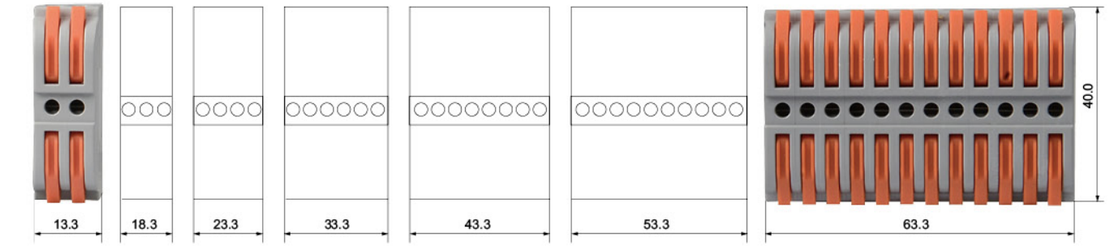

222-22 高度统一为 Highly unified as: 15.6

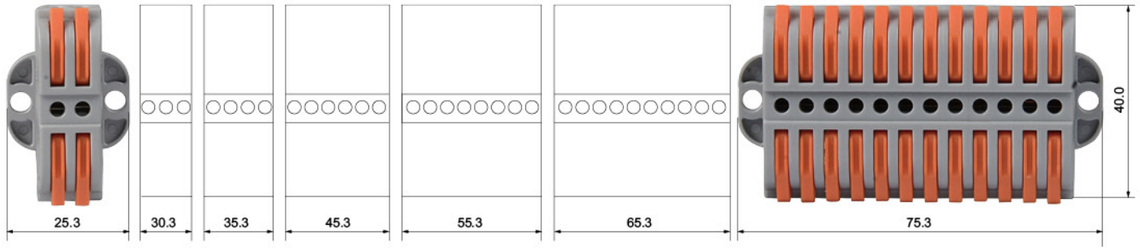

222-22G 高度统一为 Highly unified as: 15.6

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，4，6，8，10线连接器
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2, 4, 6, 8, and 10-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
222-22	2-12	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
222-22G	2-12						



分线系列
Branch series

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized

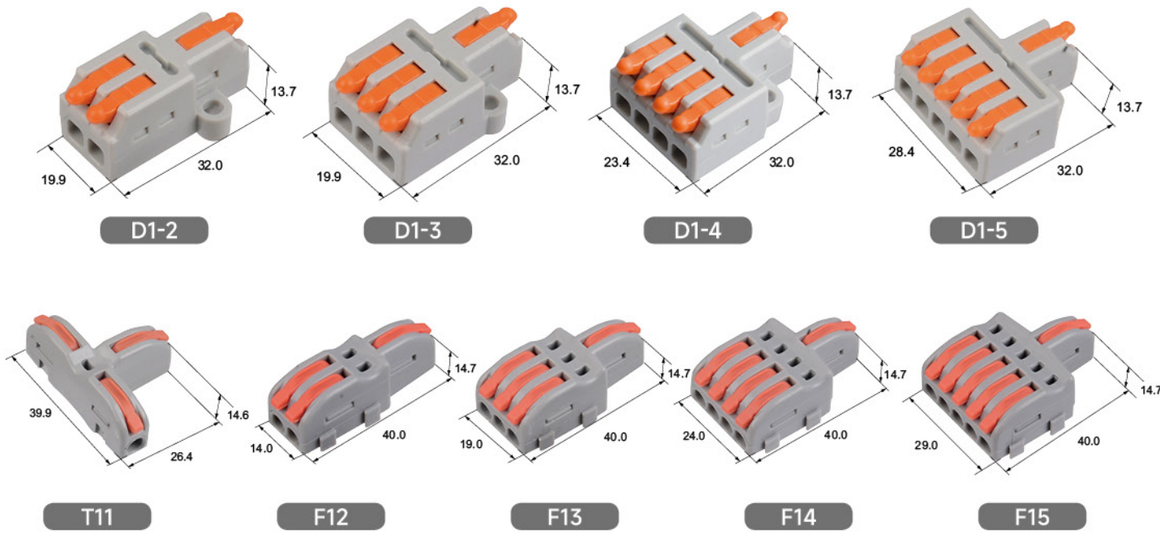

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供分线1进2/3/4/5出
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- It can provide 1 in 2/3/4/5 out
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
D1-2	3	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
D1-3	4						
D1-4	5						
D1-5	6						
T11	3						
F12	3						
F13	4						
F14	5						
F15	6						

R&R RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

手柄颜色可定制
Handle color can be customized



D2-4



D2-6



D3-6



D3-9



T624



T626



T636



T639

- 操作便捷 - 向上扳动操作手柄，
  插入导线，随后将手柄扳回原位
- 可提供分线2进4/6出 3进6/9出
- 可轻松连接截面积介于0.08-6.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire,
  and then pull the handle back in position
- Can provide 2 in 4/6 out 3 in 6/9 out
- Easily connect wires with cross-sectional areas ranging from 0.08 to 6.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
D2-4	6	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
D2-6	8						
D3-6	9						
D3-9	12						
T624	6		35A	0.08-6.0mm² 28-10AWG	0.08-6.0mm² 28-10AWG	12 mm / 0.47 inches	
T626	8						
T636	9						
T639	12						

快速连接器 Quick wire connector

手柄颜色可定制
Handle color can be customized



T2-4



T2-6



T2-8



T3-6



T3-9



T3-12



T4-8

- 操作便捷 - 向上扳动操作手柄，
  插入导线，随后将手柄扳回原位
- 可提供分线2进4/6/8出 3进6/9/12出 4进8出
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire,
  and then pull the handle back in position
- Branch lines 2 in 4/6/8 Out 3 In 6/9/12 Out 4 in 8 out
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
T2-4	6	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
T2-6	8						
T2-8	10						
T3-6	9						
T3-9	12						
T3-12	15						
T4-8	12						



2604 系列
Series

R&R RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized



D2604-2



D2604-3



D2604-4



D2604-5



D2604-6



D2604-8



D2604-10

- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，3，4，5，6，8，10线连接器
- 可轻松连接截面积介于0.2-4.0 mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 和221系列功能一致，手柄感觉更轻
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2,3,4, 5, 6, 8, and 10-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.2-4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- As with the 221 series, the handle feels lighter
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
D2604-2	2	250V	32A	0.2-4.0mm² 24-12AWG	0.2-2.5mm² 24-14AWG	12 mm / 0.47 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
D2604-3	3						
D2604-4	4						
D2604-5	5						
D2604-6	6						
D2604-8	8						
D2604-10	10						

2604D系列
Series

快速连接器 Quick wire connector

打开手柄 Open handle → 插入电线 Plug in wire → 关闭手柄 Close handle

手柄颜色可定制
Handle color can be customized



D2604D-1



D2604D-2



D2604D-3



D2604D-4



D2604D-5

- 公母插拔型连接器
- 操作便捷 - 向上扳动操作手柄，插入导线，随后将手柄扳回原位
- 可提供2，4，6，8，10线连接器
- 可轻松连接截面积介于0.2-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 可快速连接更大功率的设备

- Male and female plug type connector
- Easy operation - Pull the handle up, insert the wire, and then pull the handle back in position
- Available with 2, 4, 6, 8, and 10-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.2-4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
D2604D-1	2	250V	32A	0.2-4.0mm² 24-12AWG	0.2-2.5mm² 24-14AWG	12 mm / 0.47 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC或or PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
D2604D-2	4						
D2604D-3	6						
D2604D-4	8						
D2604D-5	10						



773-10 系列
Series

R&R RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector



773-102



773-104

773-106

773-108



773-602



773-604



773-606



773-608



773-103D



773-104D

- 操作便捷 - 将导线插入孔中，推入到位，完成
- 可提供2，3，4，6，8线连接器
- 可轻松连接截面积介于0.75-4.0mm²范围内的导线
- 连接单股、多股绞合导线，细多股导线可搭配VE端子使用
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy to operate - Insert the wire into the hole, push it into place and finish
- Available with 2, 3, 4, 6, 8-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.75 to 4.0 mm²
- Connect single-stranded and multi-stranded cables. Thin multi-stranded cables can be used with VE terminals
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
773-102	2	250V	24A	0.75-2.5mm² 18-14AWG	1.5-2.5mm² 16-14AWG	12 mm / 0.47 inches	外壳 Shell：PC 盖子 Lid：PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
773-104	4						
773-106	6						
773-108	8						
773-602	2		32A	1.5-4.0mm² 16-12AWG	1.5-4.0mm² 16-12AWG		
773-604	4						
773-606	6						
773-608	8						
773-103D	3		41A	2.5-6.0mm² 12-10AWG	2.5-6.0mm² 12-10AWG		
773-104D	4						



773-20-30 系列
Series

快速连接器 Quick wire connector



773-2102



773-2103



773-2104



773-2105



773-3102



773-3103



773-3104



773-3105

- 操作便捷 - 将导线插入孔中，推入到位，完成
- 可提供4，6，8，9，10，12，15线连接器
- 可轻松连接截面积介于0.75-2.5mm²范围内的导线
- 连接单股、多股绞合导线，细多股导线可搭配VE端子使用
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy to operate - Insert the wire into the hole, push it into place and finish
- Available with 4,6,8,9,10, 12, 15 wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.75 to 2.5 mm²
- Connect single-stranded and multi-stranded cables. Thin multi-stranded cables can be used with VE terminals
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
773-2102	4	250V	24A	0.75-2.5mm² 18-14AWG	1.5-2.5mm² 16-14AWG	12 mm / 0.47 inches	外壳 Shell：PC 盖子 Lid：PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
773-2103	6						
773-2104	8						
773-2105	10						
773-3102	6						
773-3103	9						
773-3104	12						
773-3105	15						



012 系列
Series

RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

去除导线绝缘部分 10mm Remove wire skin
按压外壳 Press case
插入电线 Insert wire
松手，完成接线 Let go. Finish wiring

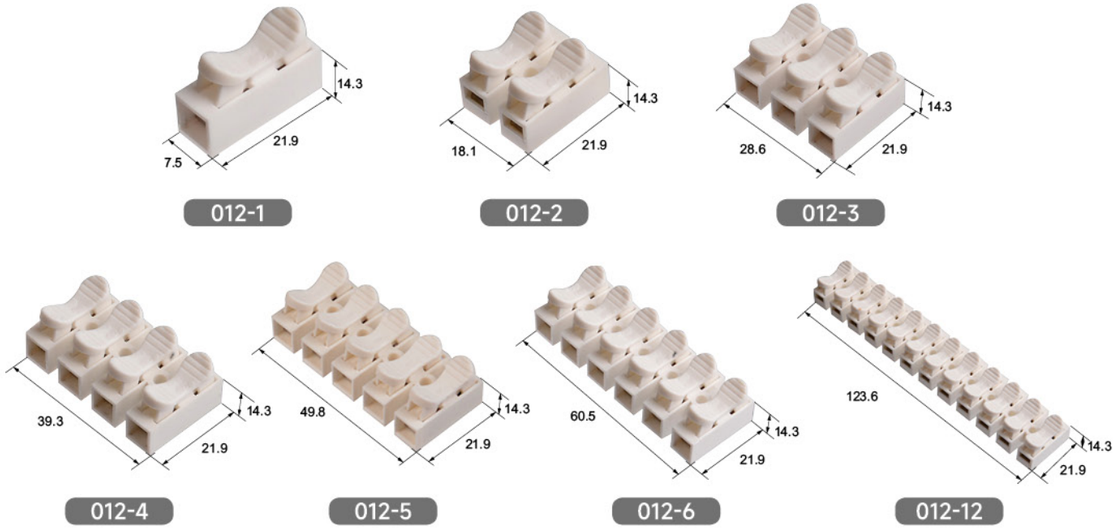

- 操作便捷 - 按压产品，插入导线，完成
- 可提供2，4，6，8，10，12，24线连接器
- 可轻松连接截面积介于0.5-2.5mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy to operate - press the product, insert the wire, and done
- Available with 2, 4, 6, 8, 10, 12, 24-wire connectors
- Wires with cross-sectional areas ranging from 0.5 to 2.5 mm² can be easily connected
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
012-1	2	250V	5A	0.5-2.5mm² 20-14AWG	0.5-2.5mm² 20-14AWG	10 mm / 0.39 inches	外壳 Shell：PA 弹簧扣 Spring fastener：301
012-2	4						
012-3	6						
012-4	8						
012-5	10						
012-6	12						
012-12	24						

照明器具用连接器系列
Connector series for lighting appliances

快速连接器 Quick wire connector

去除导线绝缘部分 10mm Remove wire skin
按压外壳 Press case
插入电线 Insert wire
松手，完成接线 Let go. Finish wiring

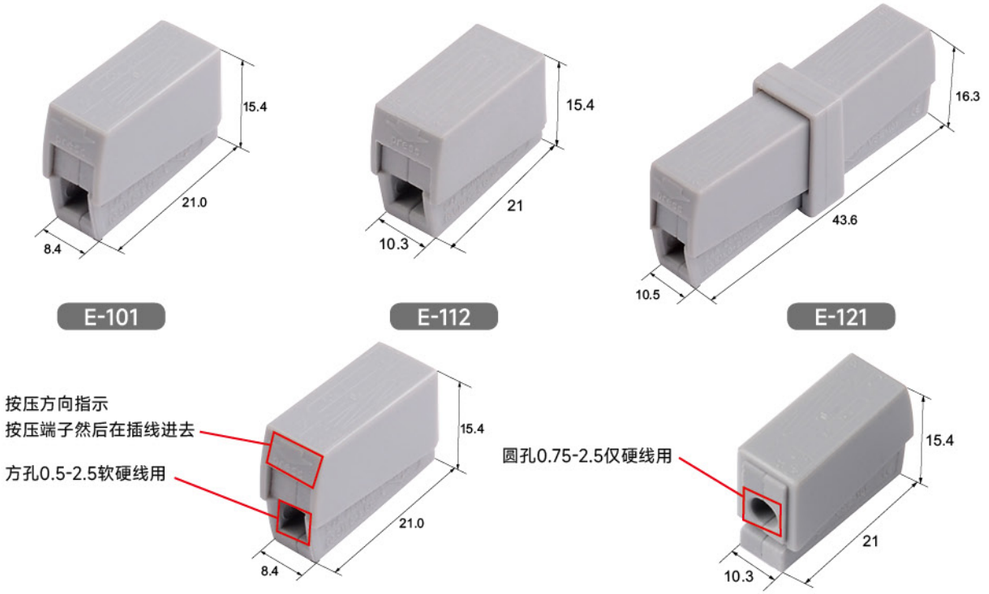

- 操作便捷 - 按压产品，插入导线，完成
- 可提供 2，3线连接器
- 可轻松连接截面积介于0.5-2.5mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy to operate - press the product, insert the wire, and done
- 2, 3-wire connectors are available
- Wires with cross-sectional areas ranging from 0.5 to 2.5 mm² can be easily connected
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
E-101	2	250V	5A	0.5-2.5mm² 20-14AWG	0.5-2.5mm² 20-14AWG	10 mm / 0.39 inches	外壳 Shell：PA 导电体 Electric conductor：紫铜 Red copper 弹簧扣 Spring fastener：301
E-112	3						
E-121	2						



导轨型系列
Rail type series

R&R RONGWEI ELECTRIC 荣伟电气

快速连接器 Quick wire connector

手柄颜色可定制
Handle color can be customized



LSA-3



LSA-5



222-K411



222-K412



222-K413

- 操作便捷 - 向上扳动操作手柄，
  插入导线，随后将手柄扳回原位
- 导轨专用接线端子，可用来替代UK PT ST
- 可提供2，4，6，10线连接器
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
  为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Easy operation - Pull the handle up, insert the wire,
  and then pull the handle back in position
- Rail special terminal, can be used to replace UK PT ST
- Available with 2, 4, 6, and 10-wire connectors
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
  Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	孔数 Number of holes	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
222-K411	2	250V	32A	0.08-4.0mm² 28-14AWG	0.08-2.5mm² 28-14AWG	10 mm / 0.39 inches	外壳 Shell：PC 或or PA 手柄 Handle：PC 或or PA 导电体 Electric conductor：紫铜Red copper 弹簧扣 Snap fastener：301
222-K412	4						
222-K413	6						
LSA-3	6		20A				
LSA-5	10						

免破线系列
No break line series

快速连接器 Quick wire connector

手柄颜色可定制
Handle color can be customized



M11



M12



M22



M24

- 免断线分线器
- 灯具专用接线端子
- 可提供1分1/ 1分2
- 可轻松连接截面积介于0.08-4.0mm²范围内的导线
- 连接单股、多股绞合和细多股导线
- 为安装人员和设备制造商节省时间
- 可快速连接更大功率的设备

- Interrupt-free splitter
- Lamps special terminal
- 1 point 1/ 1 point 2 available
- Easily connect wires with cross-sectional areas ranging from 0.08 to 4.0 mm²
- Connect single strand, multiple strand and thin multiple strand wires
- Save time for installers and equipment manufacturers
- Connect more powerful devices quickly

产品型号 Product model	主线接线范围 Main line connection range	额定电压 Rated voltage	额定电流 Rated current	实心导线 Solid wire BV	多股导线 Multiple conductor BVR/RV	剥线长度 Strip length	材质 Material
M11	A型type0.5-1.5mm² B型type1.5-2.5mm² C型type2.5-4.0mm²	250V	32A	0.08-4.0mm² 28-12AWG	0.08-2.5mm² 28-12AWG	10 mm / 0.39 inches	外壳 Shell：PC 手柄 Handle：PA 导电体 Electric conductor：紫铜Red copper 弹簧扣 Spring fastenerr：301
M12							
M22							
M24							